



TRASFORMATORI AD ALTO ISOLAMENTO

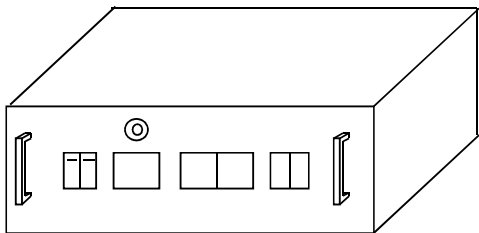


KVA	Tipo	Serie	L (mm)	P (mm)	H (mm)	Kg	Box
1.5	01M290R	1251	485	513	265	38	BR01
3.5	03M117R	149	485	513	265	48	BR01
7.5	07M104R	96	485	513	265	68	BR01
7.5	07T306R	77	485	513	265	80	BR01
15	15T335R	1353	485	513	265	105	BR02

Tensioni standard: 230/230 V
In contenitore metallico RACK + Accessori
Isolamento 6 - 16 KV

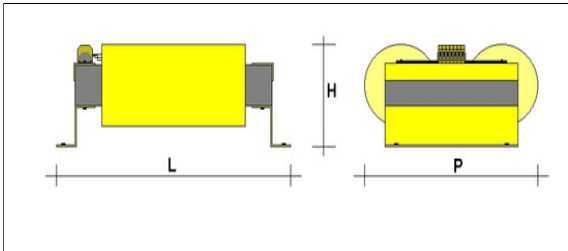


1.5	01M290	1251	270	160	150	20	BT01
3.5	03M117	7.5 149	300	200	160	30	BT02
07M104	96	350	240	170	50	BT02	

Tensioni standard: 230/230 V
Isolamento 6 - 16 KV

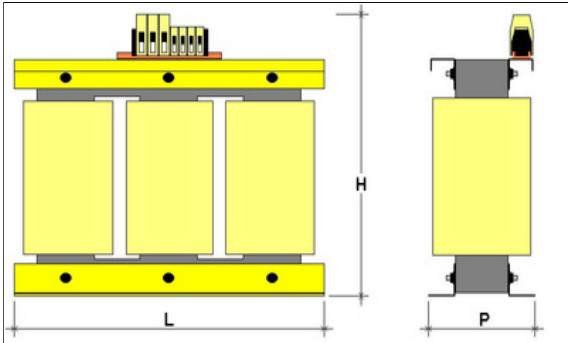

7.5	07T306	77	360	160	360	63	BBC01

Tensioni standard: 400/400 V
Isolamento 6 - 16 KV
Gruppo Dyn11

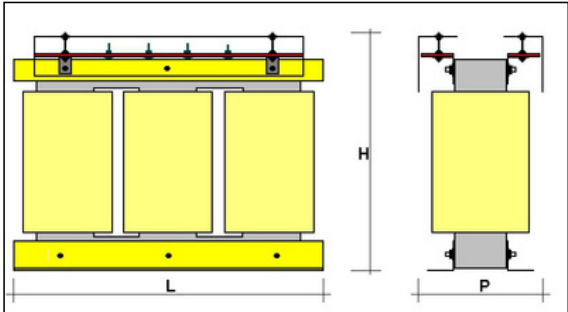

10	10T319	83	420	180	410	88	BBC01
15	15T317	224	420	185	410	93	BBC01
20	20T320	29	540	220	510	130	BBC03
25	25T300	341	480	220	470	155	BBC02
30	30T318	35	480	240	470	165	BBC02
40	40T317	795	540	250	520	183	BBC03
60	60T306	54	600	270	570	245	BBC03

Tensioni standard: 400/400 V
Isolamento 6 - 16 KV
Gruppo Dyn11